

Key Locker

(see pages 2 and 3 for measurements)



TOUCH-CAPACITIVE

- Brightness: 450 Nits
- Chemical resistant / Anti-glare coated
- Glass withstands a 225g drop ball test from 1.6 meters



DIMENSIONS

- 15" x 23.7" x 4.56"
- 383.5mm x 604.5mm x 212.6mm



NETWORK

- Ethernet via RJ-45 Connector




COMPLETE SYSTEM

- Camera: 160° FOV
- Camera resolution: VGA 640 x 480
- Mono Speaker Output: 16bit, 48kHz, 0.6W
- 512mb DDR3 DRAM
- Storage: 4GB
- For indoor use only
- Min Temp: 0°C / 32°F
- Max Temp: +50°C/ +122°F



POWER REQUIREMENTS


- DC voltage: 12 VDC
- Average power consumption: 15W

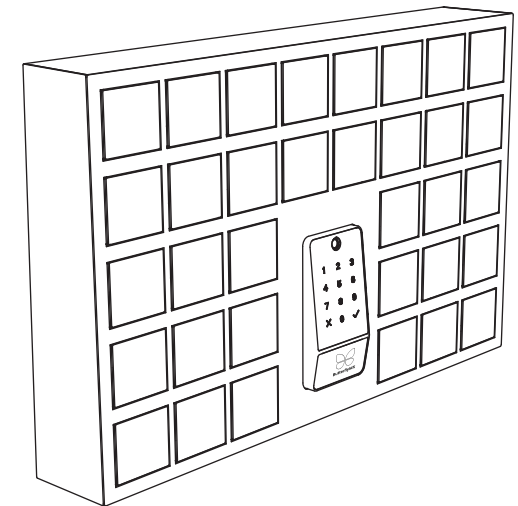


Support:

P: (571) 480-6579 ext. 2 (Mon-Fri, 6am-10pm EST)


E: support@butterflymx.com

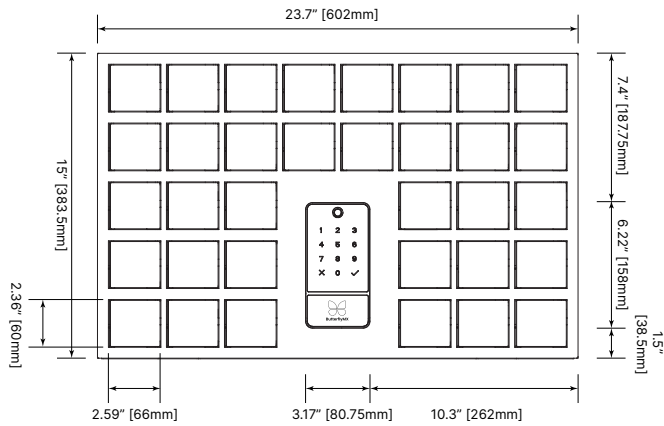


1 KEY LOCKER FRONT ELEVATION
NOT TO SCALE

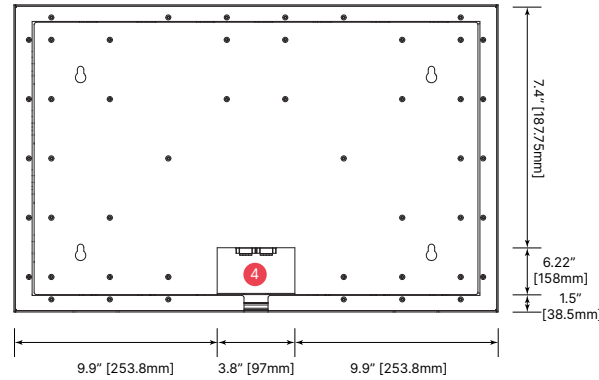


2 KEY LOCKER REAR ELEVATION
NOT TO SCALE

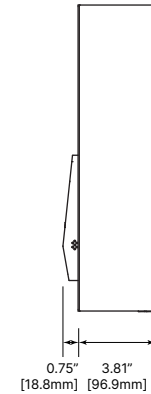


3 KEY LOCKER SIDE ELEVATION
NOT TO SCALE

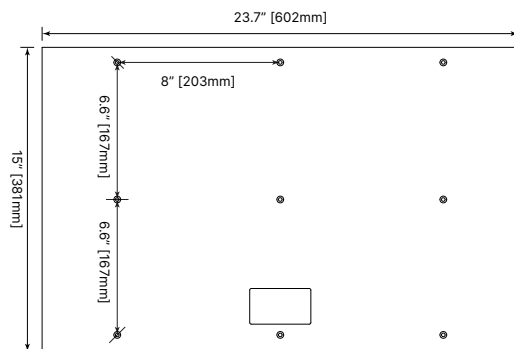

4 BACKPLATE FRONT ELEVATION
NOT TO SCALE

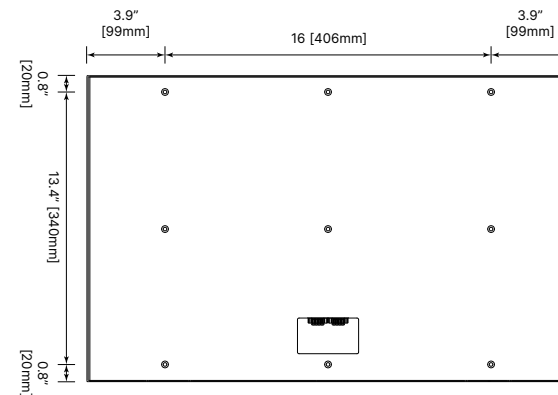


5 KEY LOCKER REAR ELEVATION w/ BACKPLATE
NOT TO SCALE

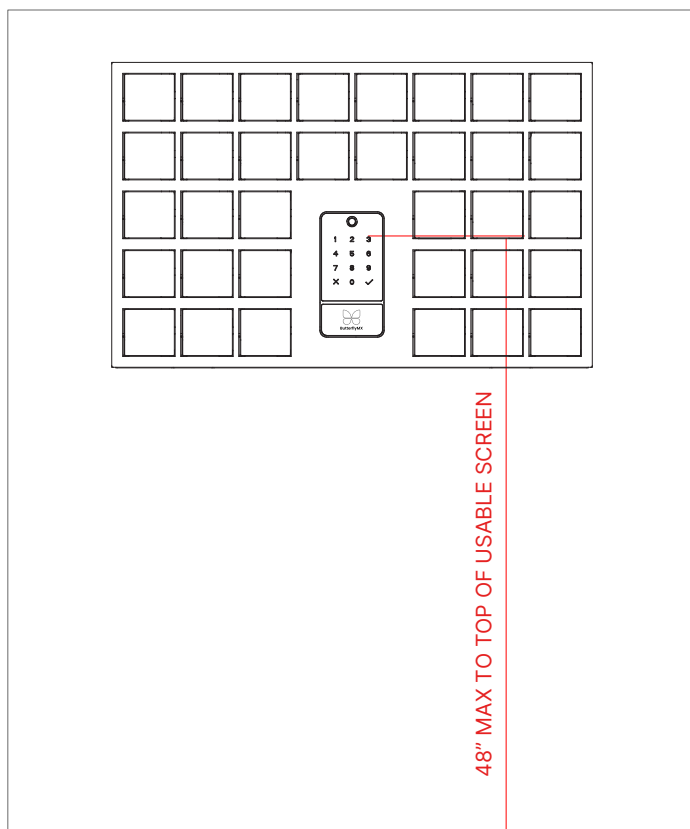

ADA Compliance Requirement

1 FRONT VIEW
NOT TO SCALE

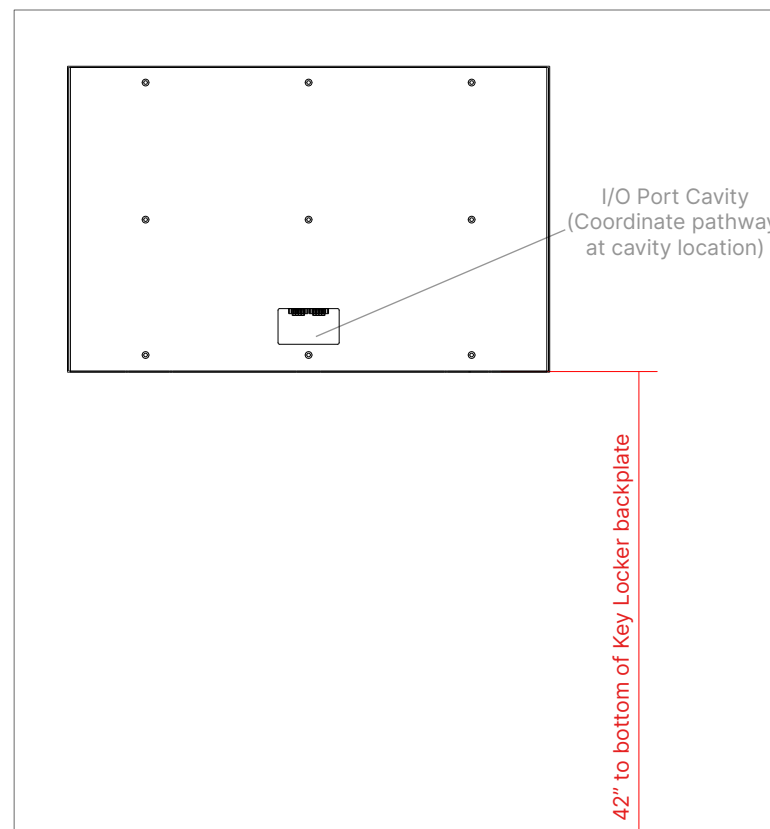

ADA Compliance Requirement

2 REAR VIEW: BACKPLATE PLACEMENT
NOT TO SCALE