




Key Locker Installation Guide

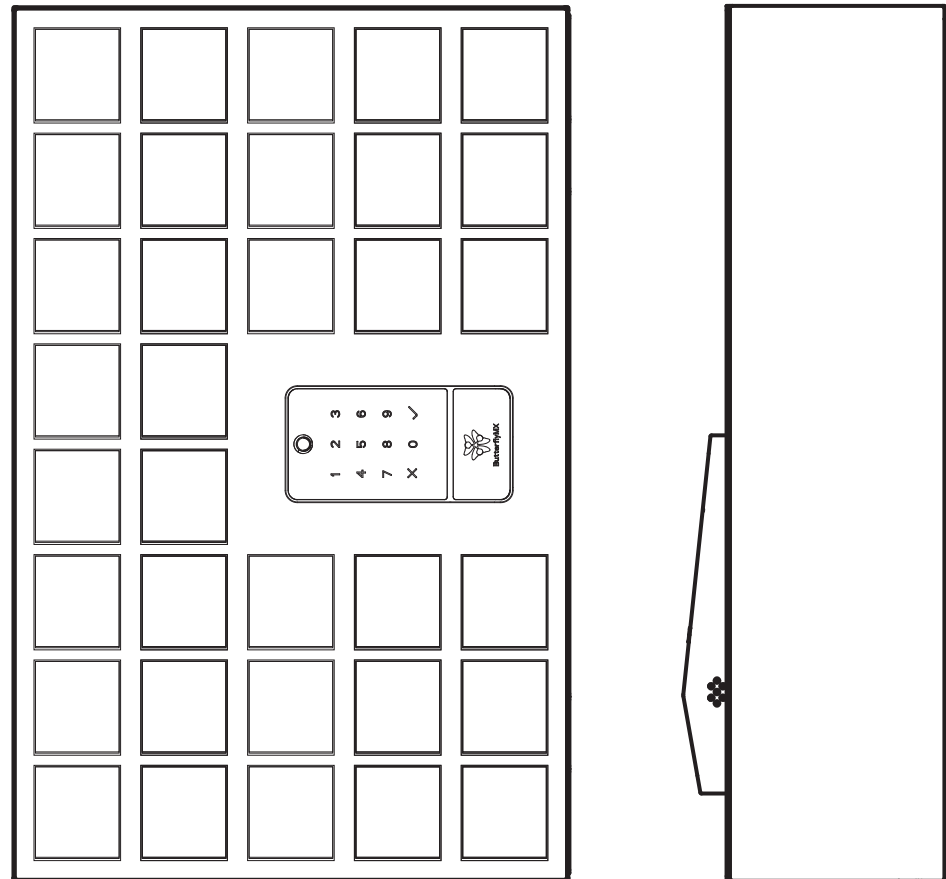

Packing List

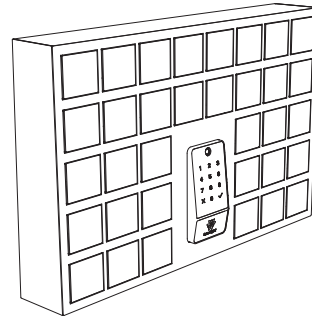

Key Locker

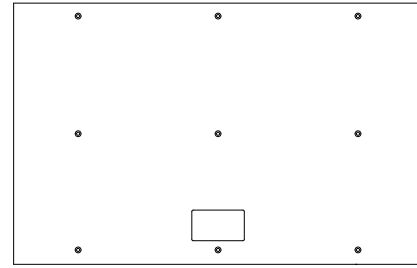

Backplate

Installation kit:

- Installation hardware (9x M4 screws, 9x wall anchors)
- 2x security screws
- 1x security screwdriver
- 1x power cable: NEMA 5-15 (typical 3-prong male) IEC320-C13 (to power supply)
- 1x power supply: AC to DC transformer; input: 100-240V AC (mains), output: 36W 12V locking barrel connector

ButterflyMX does not provide:


- Uninterrupted Power Supply (UPS)
- CAT5e/6
- Alternate length transformer-to-wall cord

Installation Instructions

1. Scan QR code on the back of the key locker and provide required information. If you do not have access to a smartphone, locate and record the key locker serial number:

2. Ensure min. wiring specs are met
 - Power: AC-to-12VDC transformer brick with installer-supplied UPS
 - Installer should not modify supplied transformer
 - Internet: CAT5e/6 < 300' to router/switch
3. Mount Key Locker Backplate to wall with supplied screws
4. Connect power and ethernet cables to pigtail connectors on Key Locker
5. Mount Key Locker to Backplate
6. Fasten Key Locker to Backplate with provided security screws and screwdriver
7. Call ButterflyMX Support to activate Key Locker

Wiring Diagram

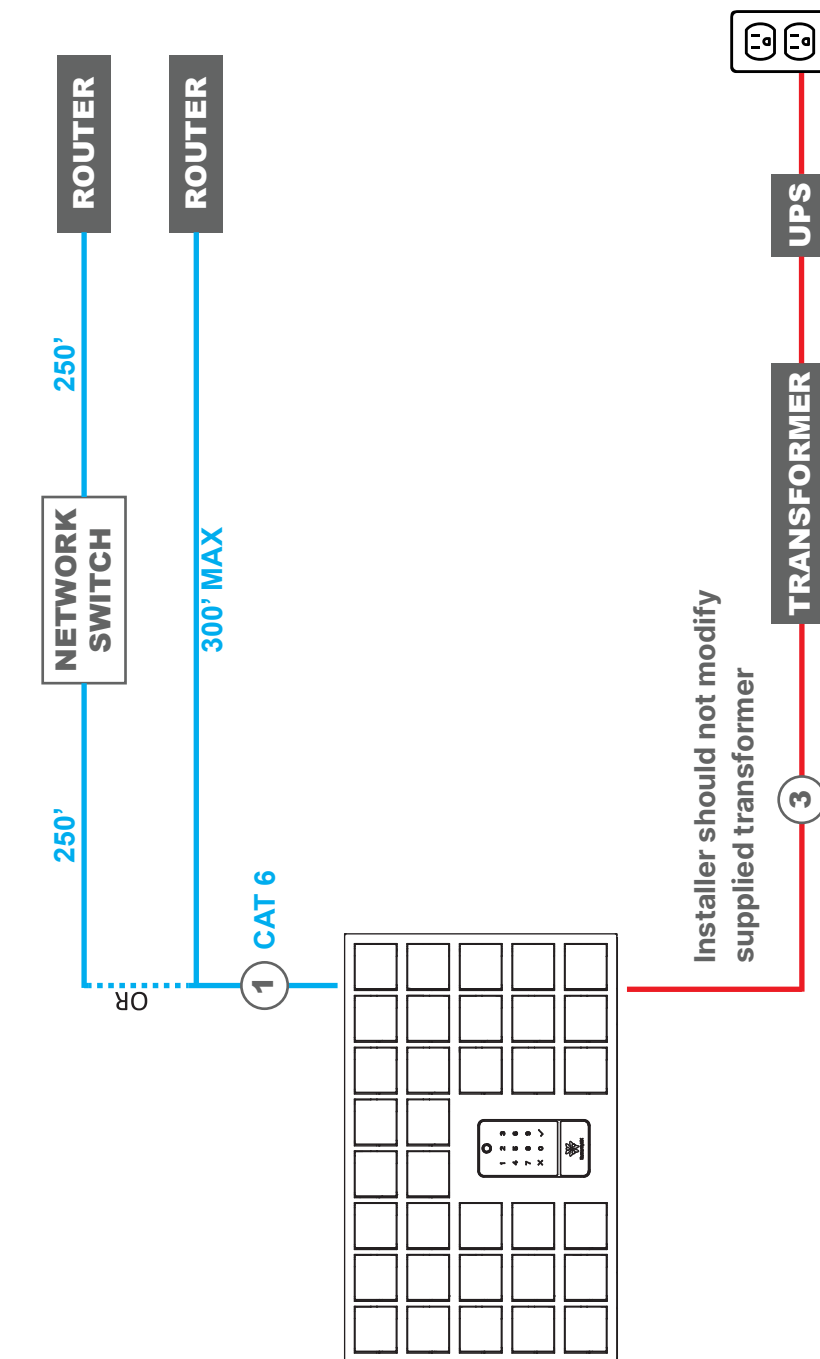

Support

Mon-Fri, 6am-10pm EST
(571) 480-6579 ext. 2
support@butterflymx.com
www.butterflymx.com/keylocker

Need help?

Use our troubleshooting guide.
www.butterflymx.com/keylocker/troubleshooting



Key Locker

by ButterflyMX

