




Access readers

Open and manage doors and gates with a smartphone, fob, keycard, or PIN code

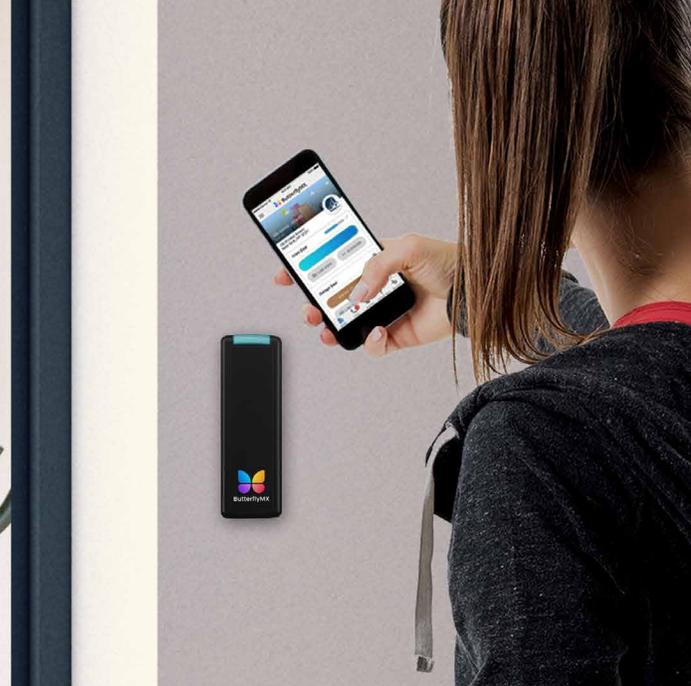

ButterflyMX's line of contactless access control readers offers a modern aesthetic and state-of-the-art features that simplify the building-wide access experience.

Open doors and gates with a variety of credentials, including smartphones, fobs, keycards, or PIN codes.

OPEN DOORS WITH A SMARTPHONE



All ButterflyMX access control readers work with the ButterflyMX mobile app, which means tenants and staff can unlock doors & gates from their smartphones.

WORKS WITH OTHER BUTTERFLYMX PRODUCTS



Seamlessly connect your ButterflyMX access control readers with our other products — including our video intercoms, elevator controls, and key lockers — to enjoy a unified property access solution.



Mullion



Keypad



Single gang

KEY FEATURES INCLUDE:

- Multiple access technologies: mobile app, key fob, keycard & PIN
- Indoor- and outdoor-rated
- Visual light confirmation and audible beep
- Provides end-to-end data encryption
- OSDP secure channel
- MIFARE EV1 and EV2 support
- Certifications: FCC, IC, CE, UL 294, UL 62368, EN (302291, 301489, 300330, 50130-4) IP55, BIS IS 13252

Rev. 03/17/2023

TECHNICAL SPECIFICATIONS:

<p>Model</p>	 <p>Mullion</p>	 <p>Single gang</p>	 <p>Keypad</p>
<p>RF technologies</p>	<p>13.56 MHz & mobile</p>		
<p>Color</p>	<p>Black</p>		
<p>Current</p>	<p>105 mA average, 145 mA peak</p>	<p>120 mA average, 170 mA peak</p>	<p>145 mA average, 195 mA peak</p>
<p>Voltage operating range</p>	<p>5-16 VDC</p>		
<p>Temperature range</p>	<p>-31° F to 150°F (-35° C to 66°C) and 95% humidity</p>		
<p>Protection and Resistance</p>	<p>IP55 protection from dust and water exposure</p>		
<p>Read range</p>	<p>up to 2"</p>		
<p>Dimensions</p>	<p>5.1" H x 1.7" W x 0.71" D</p>	<p>5.1" H x 3.25" W x 0.71" D</p>	
<p>Visual / audio</p>	<p>LED light bar; audible buzzer</p>		
<p>Security level</p>	<p>EAL6+ cryptographic module</p>		
<p>Warranty</p>	<p>2 years</p>		

Rev. 03/17/2023