


Vehicle Reader Tags

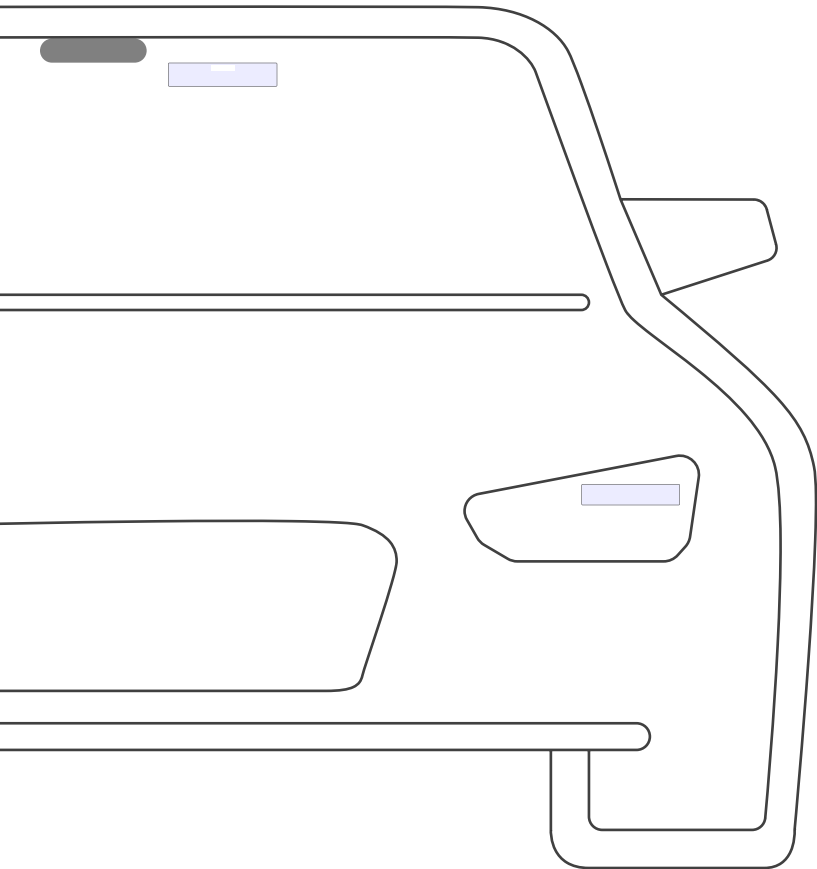


Setting up Vehicle Reader Tags

Setting up the Windshield and Headlight Tags for your building is simple. Assign tags to residents directly in the ButterflyMX OS.

You will need to let residents know how and where to place their tags.

- **Windshield tags** must be positioned inside the vehicle at the top of the windshield next to the central rearview mirror. The tags must be adhered to the glass, not to the interior cloth or plastic edges.
- **Headlight tags** must be installed on one of the front lights of the car. The tags must be adhered to plastic, not the metal body of the car.
- Inform residents which side of the garage the Vehicle Reader is installed on as the tag must be placed on the side closest to the Reader.
- Tags are not meant to be transferred between cars or tenants. Attempting to transfer a tag may result in damage to the antenna and loss of adhesion.
- Once installed, residents can use swipe-to-open in the mobile app or their tag to access the gate or garage.

Athermic Windshields

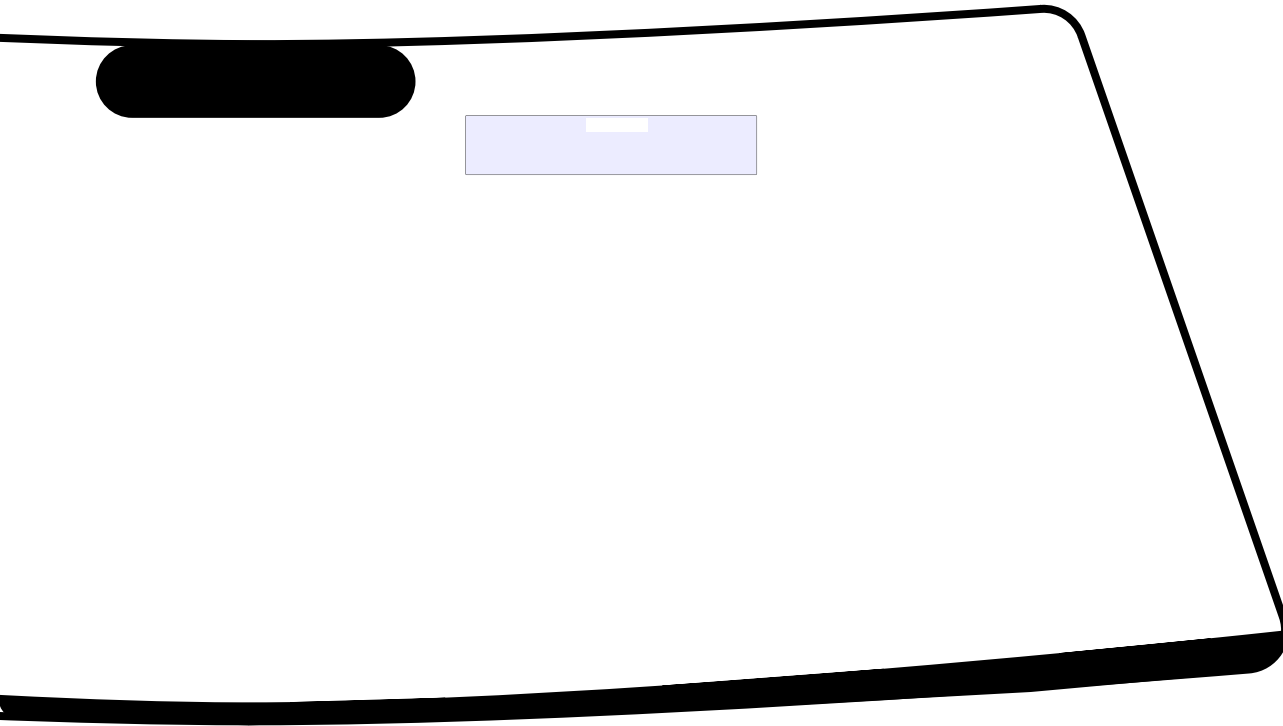

Athermic windshields impact the performance of the Vehicle Reader, as the metal on the windshield blocks the Reader from reading the Tag.

Most athermic windshields have a non-athermic section intended for radio-based systems (like GPS or toll payment badges). Even if placed in this area, the read distance may be shorter than expected.

For support on installing the Windshield Tag on athermic windshields, please contact ButterflyMX Solutions Architecture.